

FIG. 1

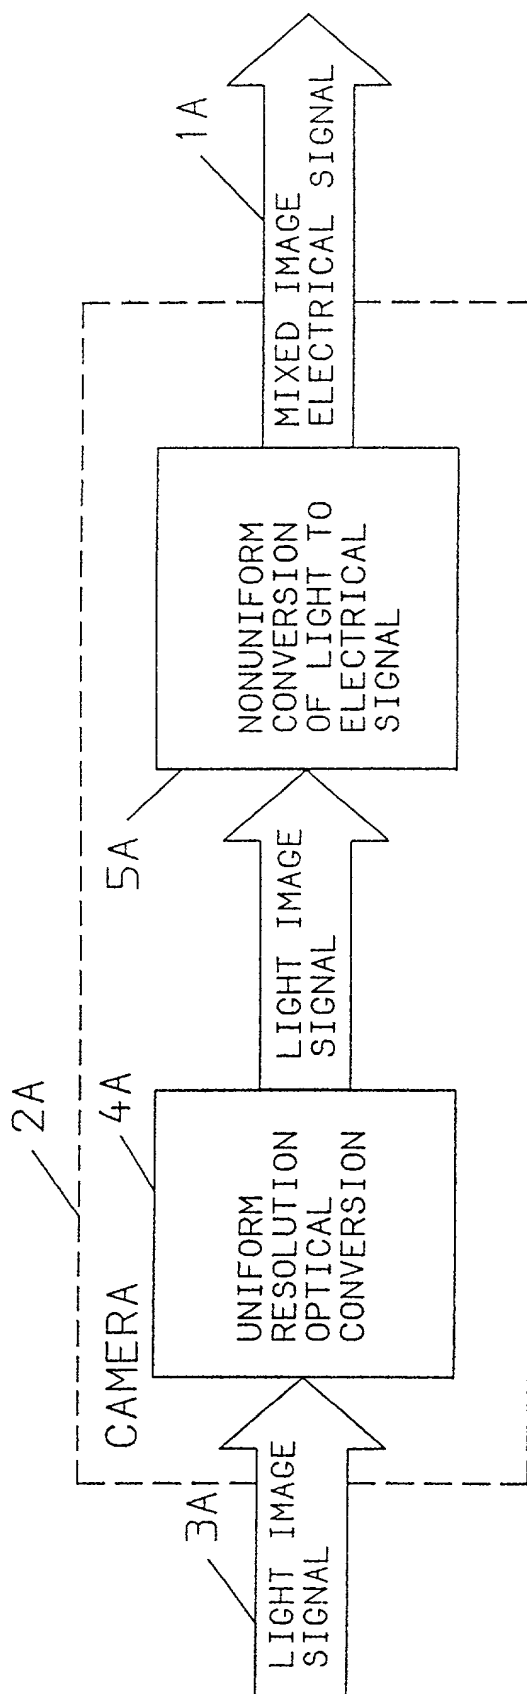


FIG. 1A

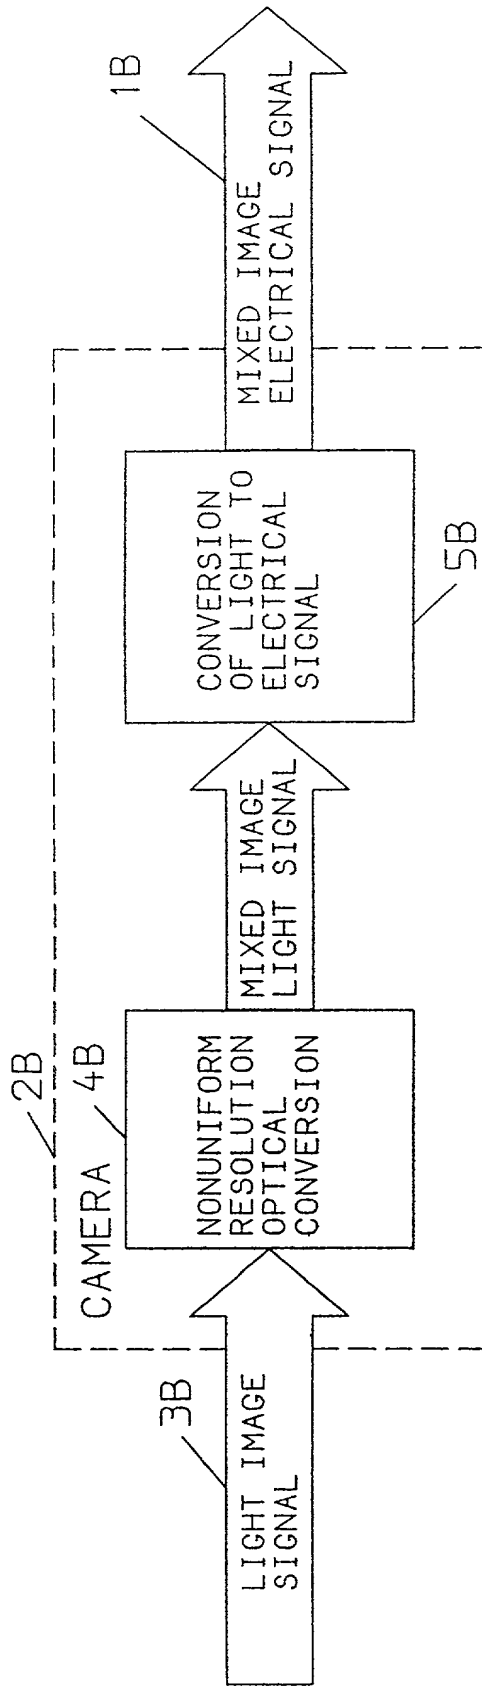


FIG. 1B

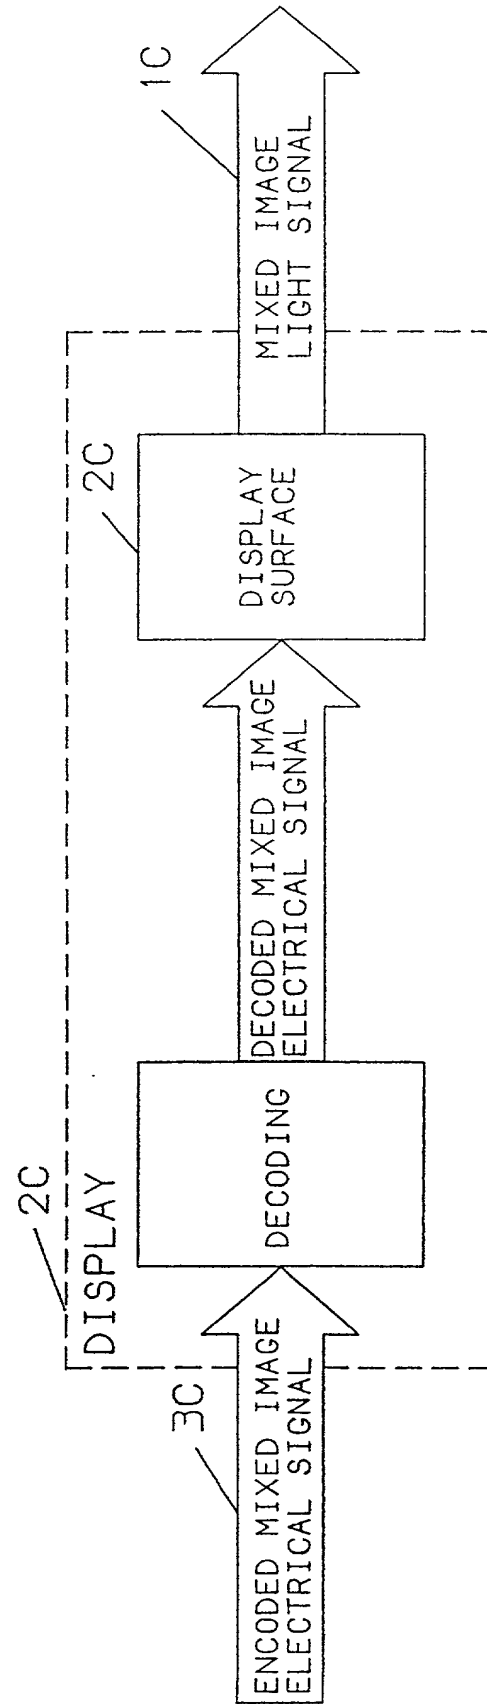


FIG. 1C

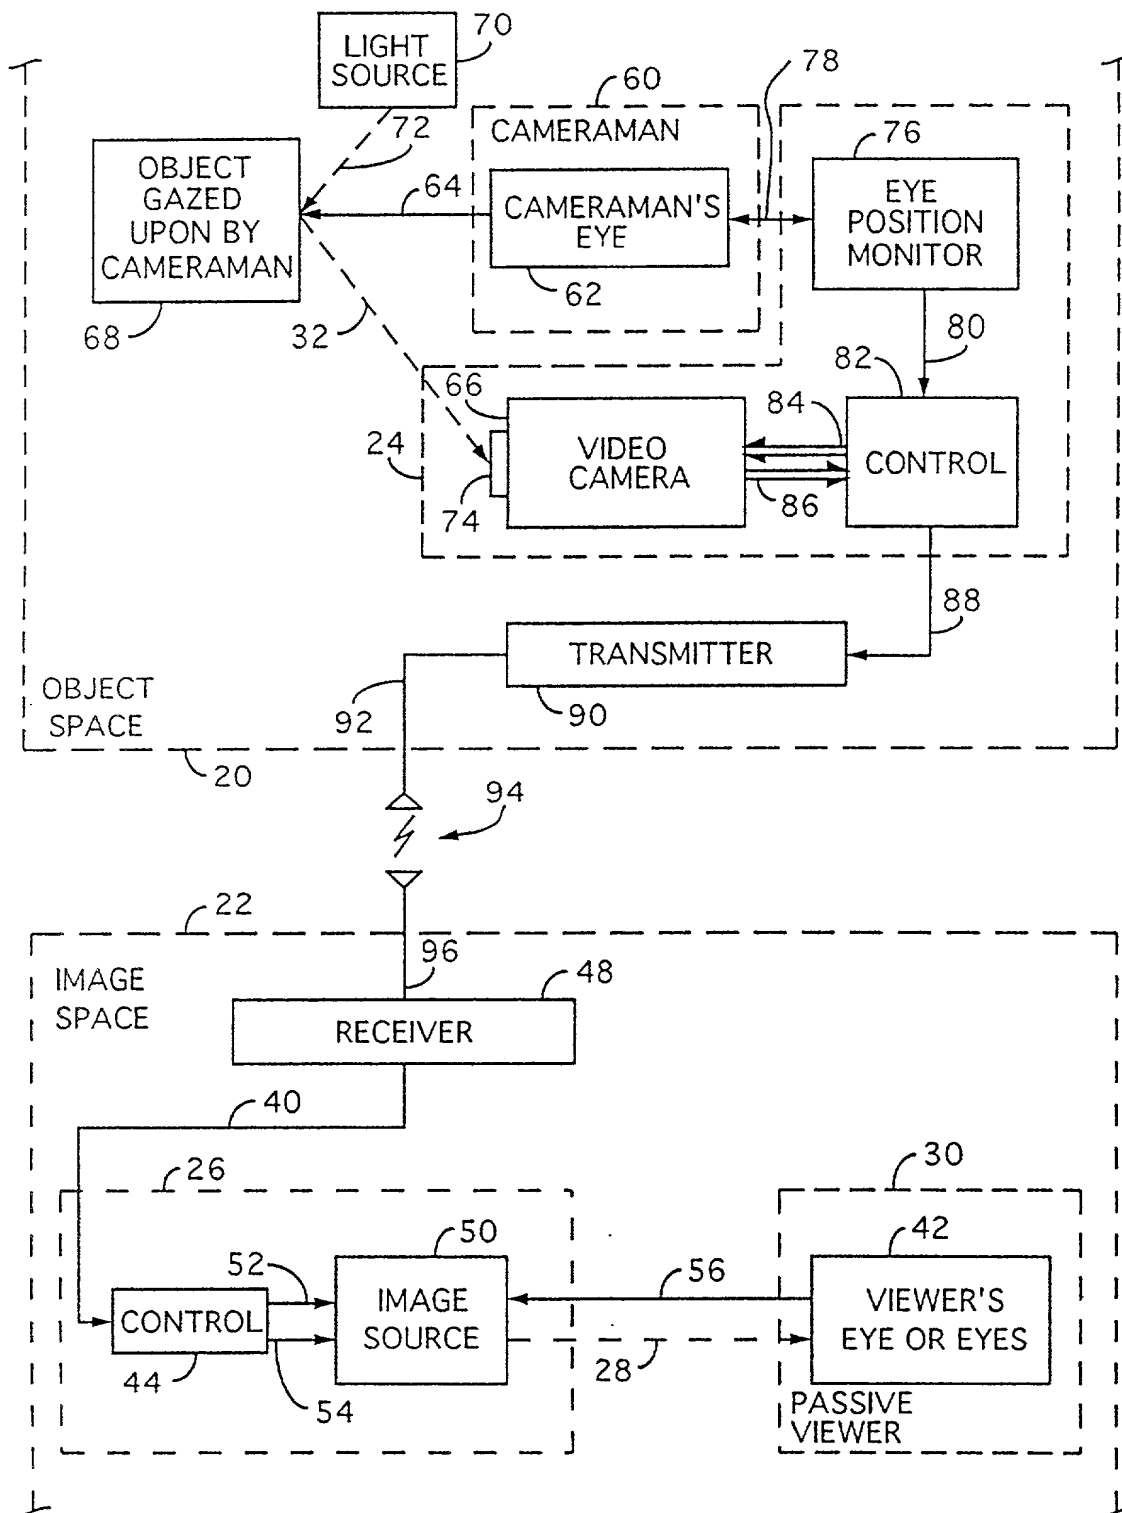


FIG. 2

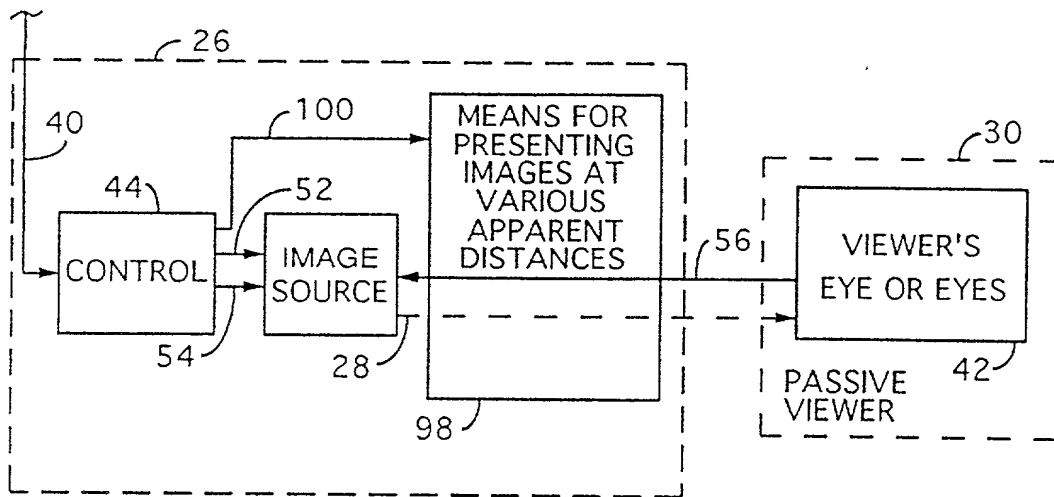


FIG. 3

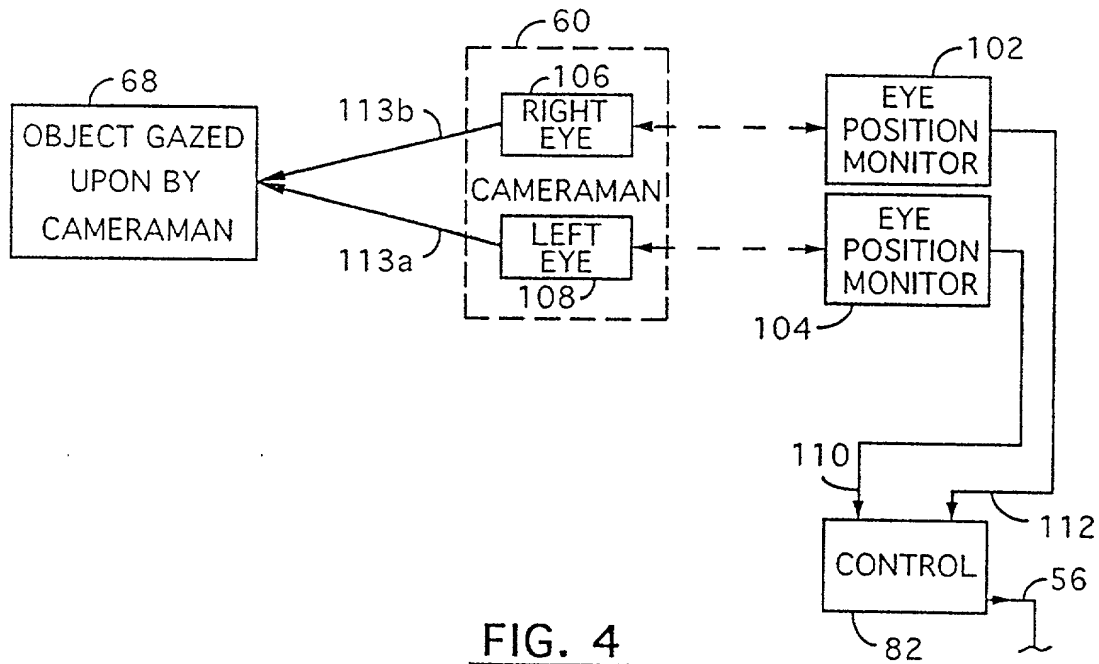
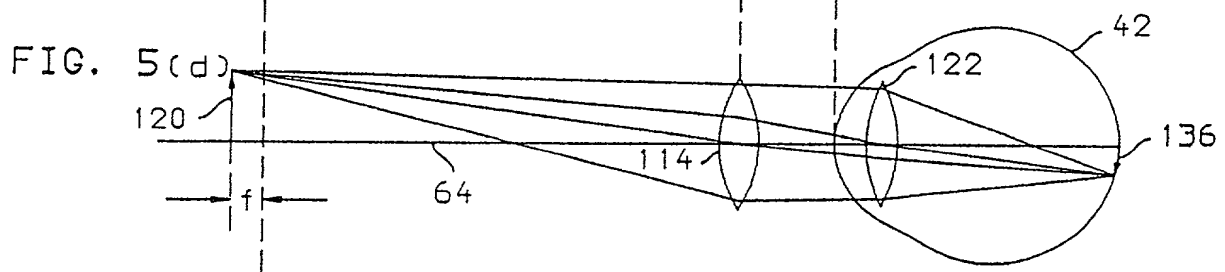
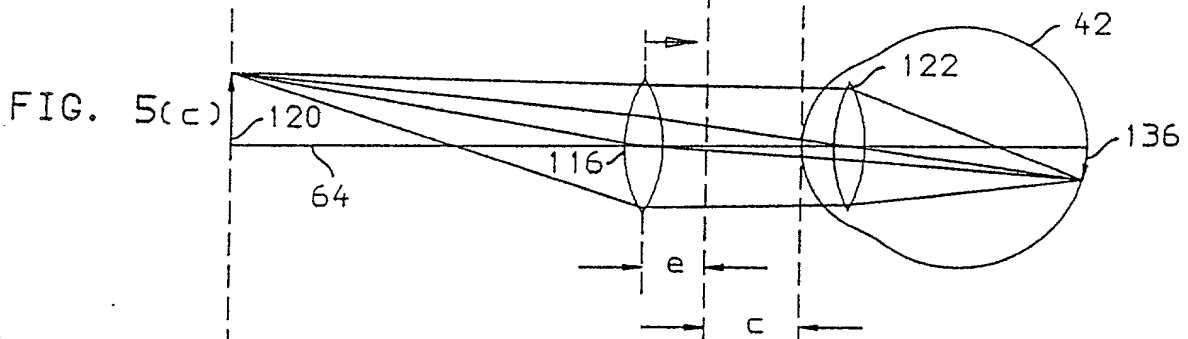
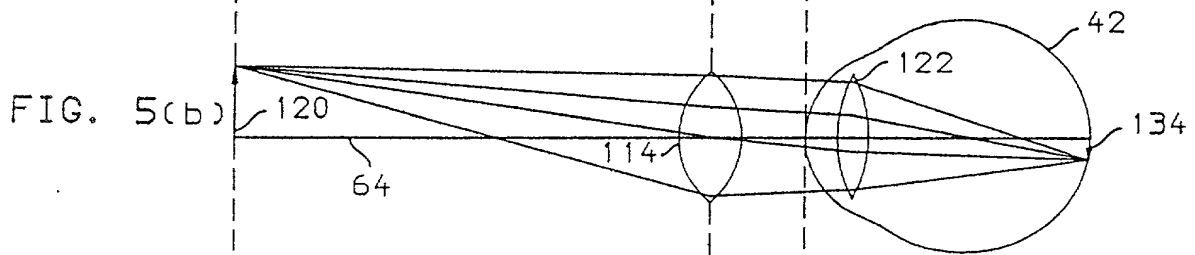
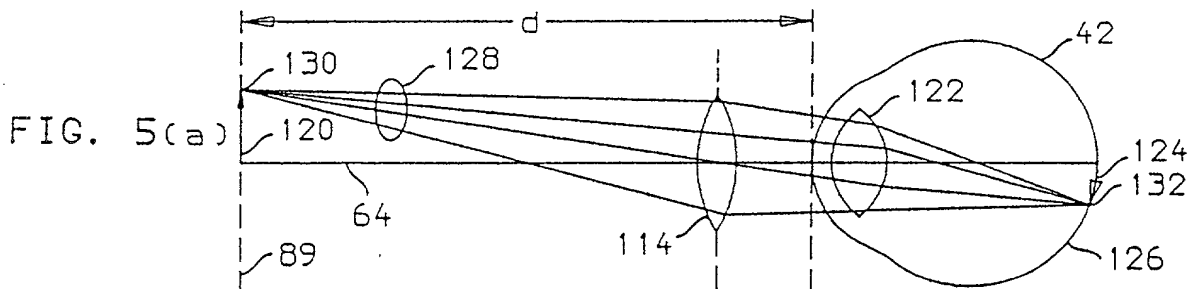
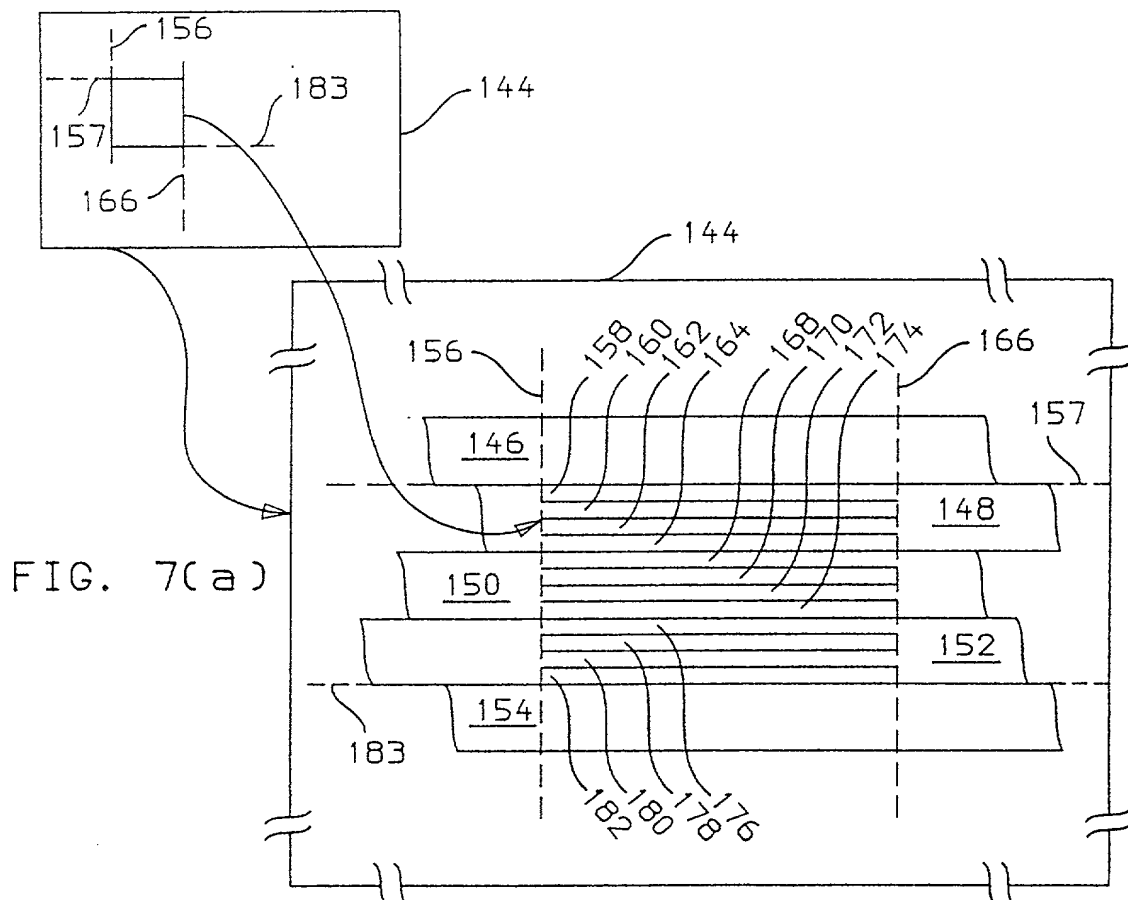
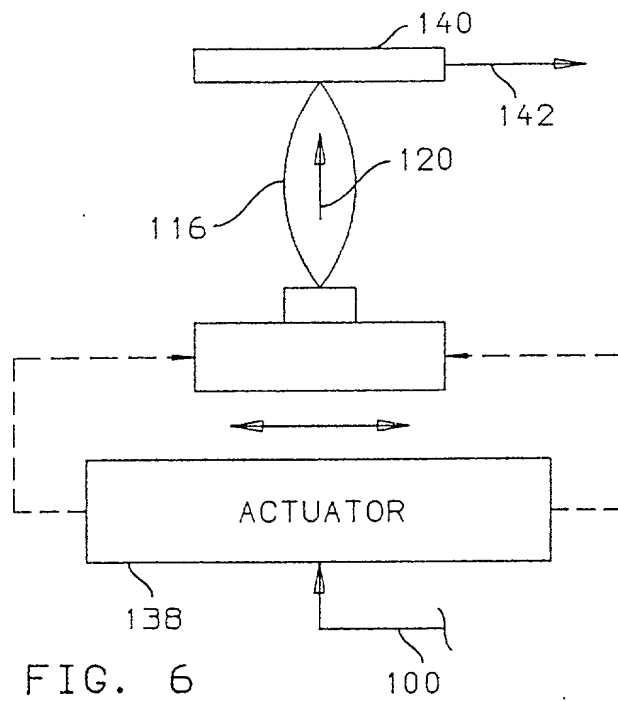


FIG. 4





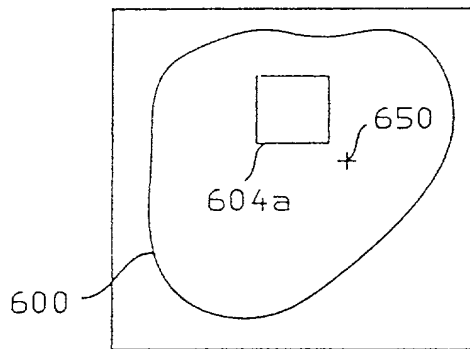


FIG. 18(c)

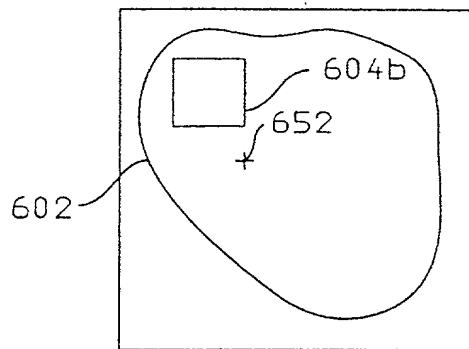


FIG. 18(d)

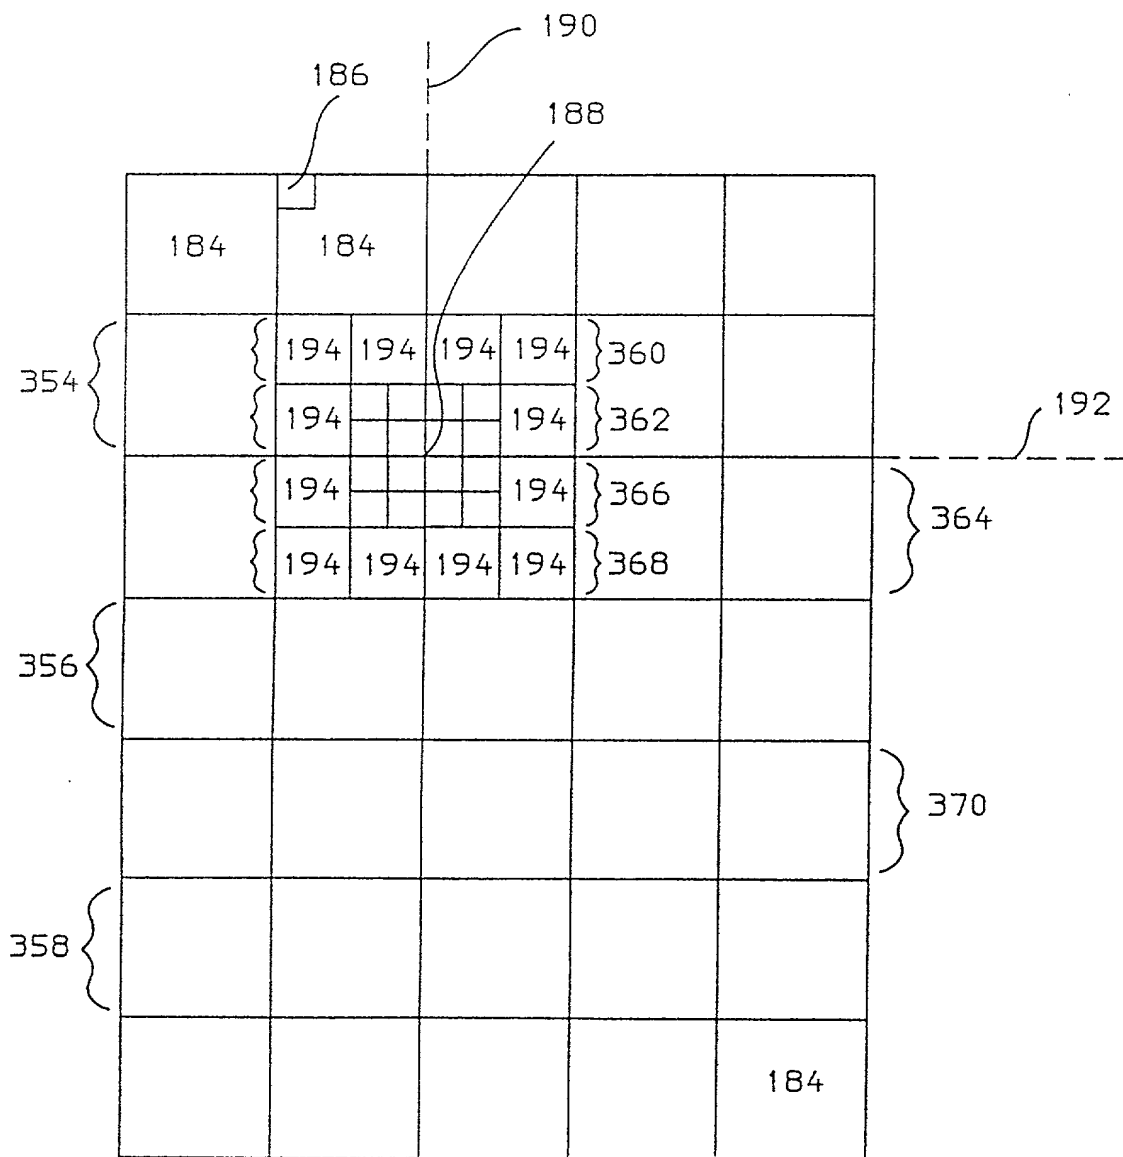


FIG. 7(b)

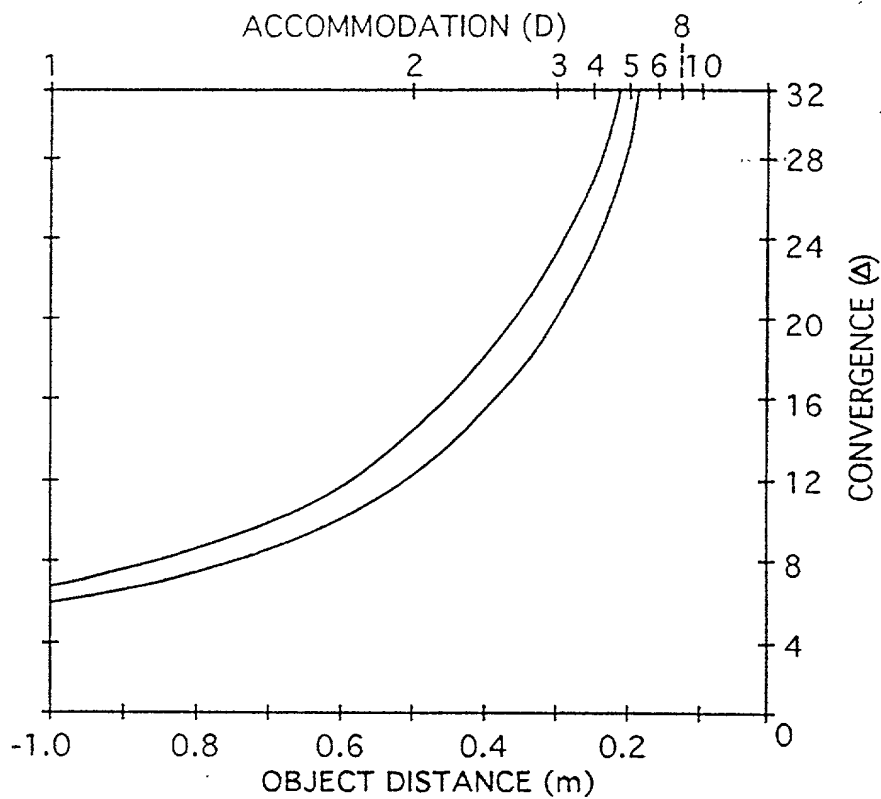


FIG. 19




FIG. 8




FIG. 9




FIG. 10




FIG. 11




FIG. 12

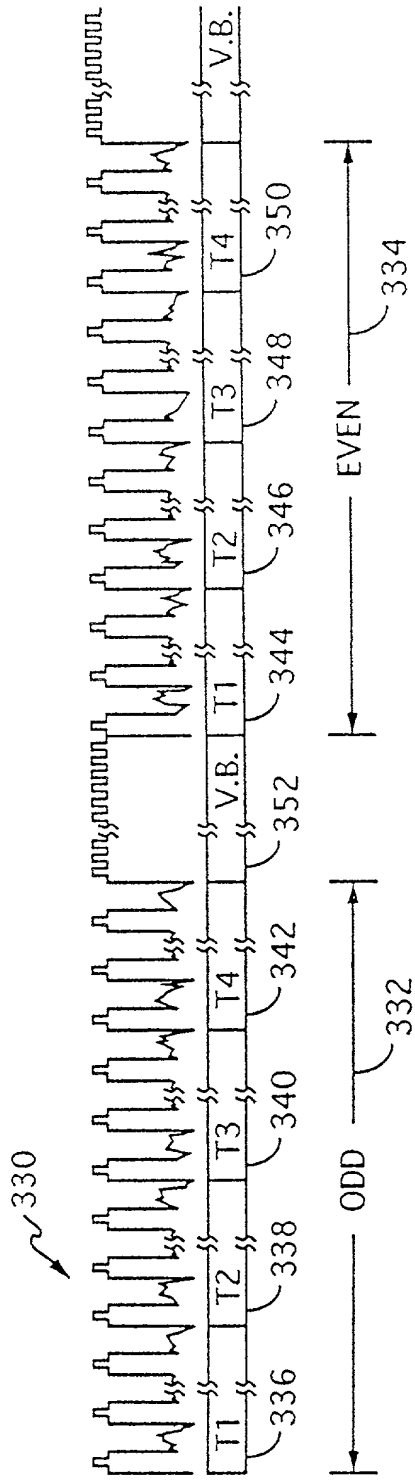


FIG. 14

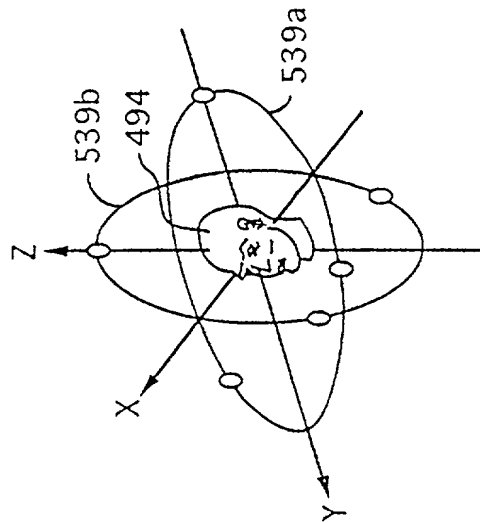


FIG. 16a

13 (b)	13 (d)
13 (c)	13 (e)

FIG. 13

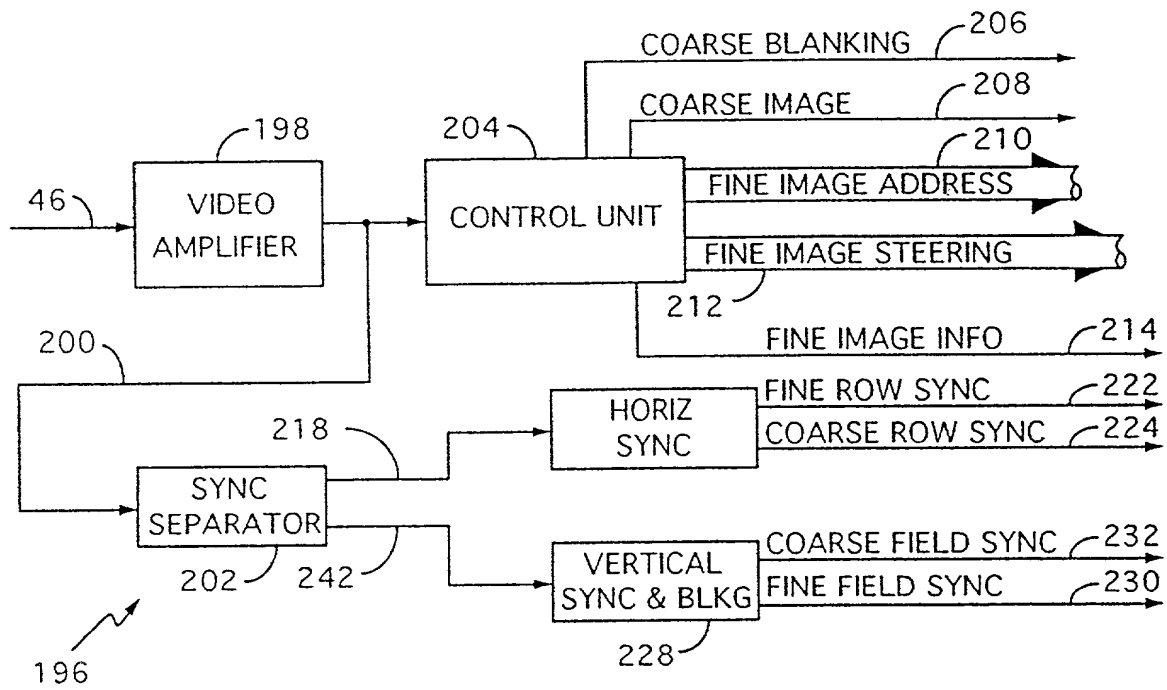


FIG. 13a

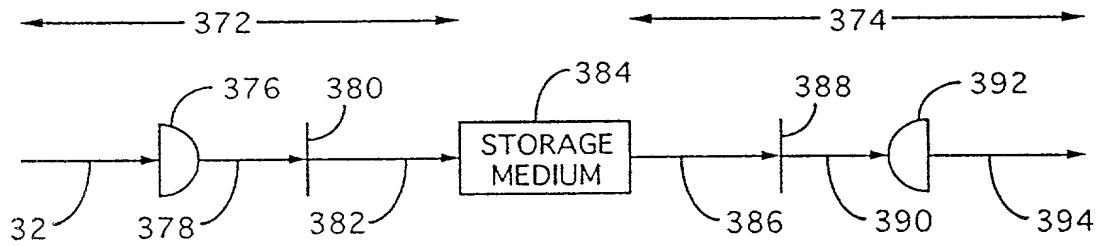


FIG. 15

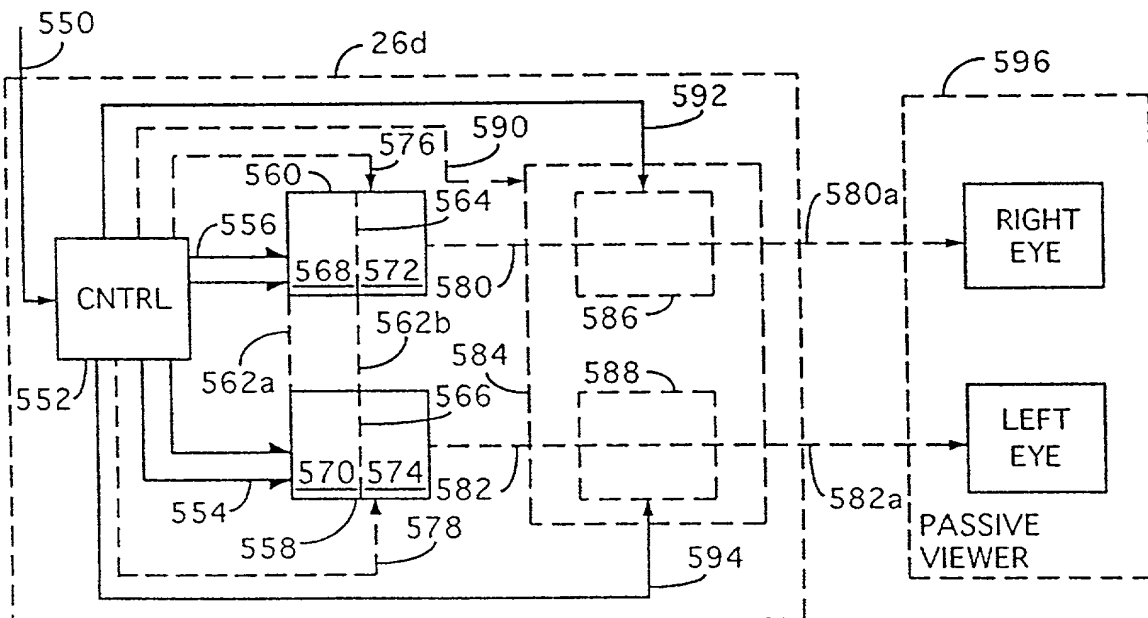


FIG. 17

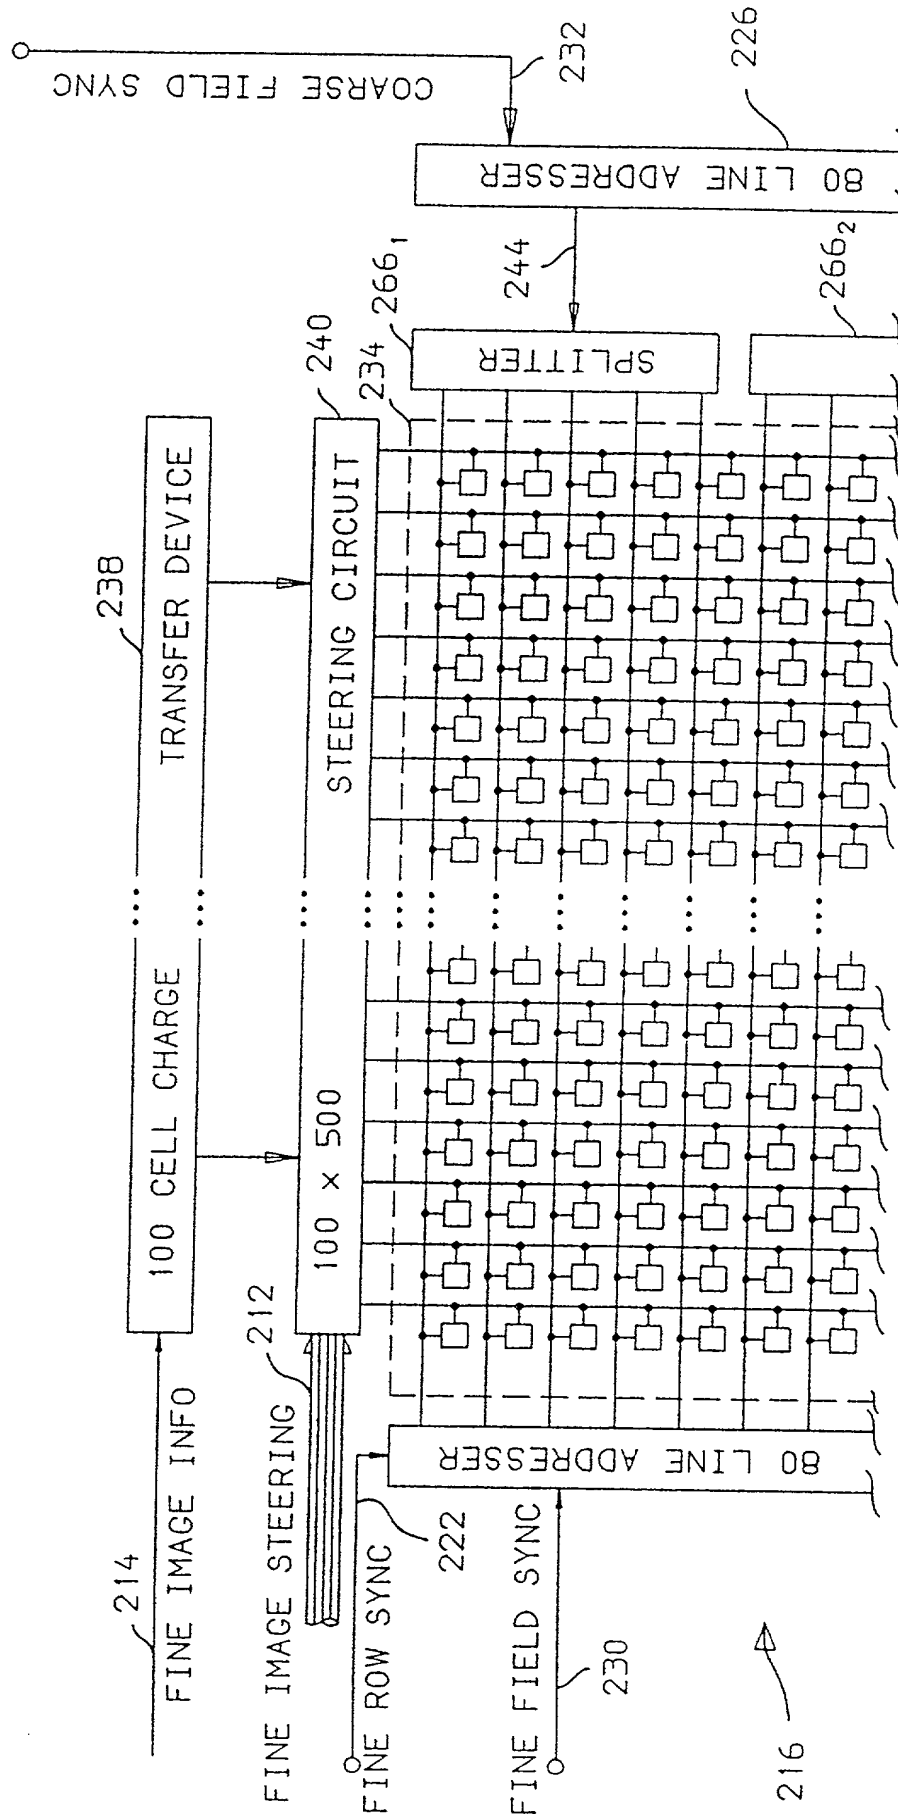


FIG. 13(b)

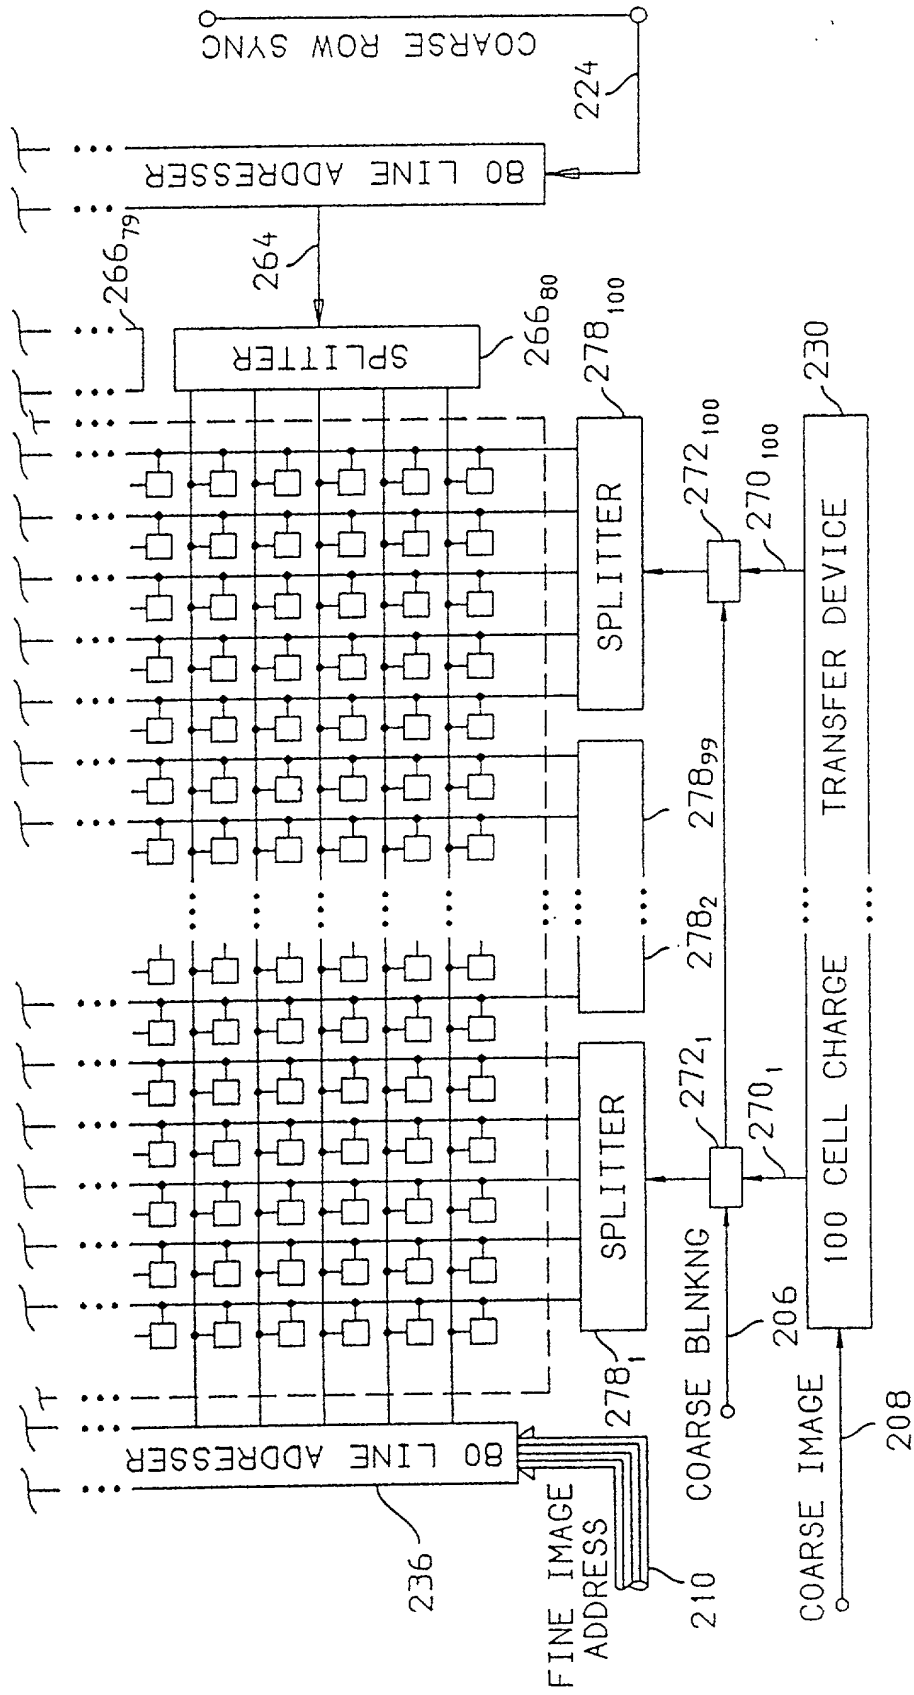


FIG. 13(c)

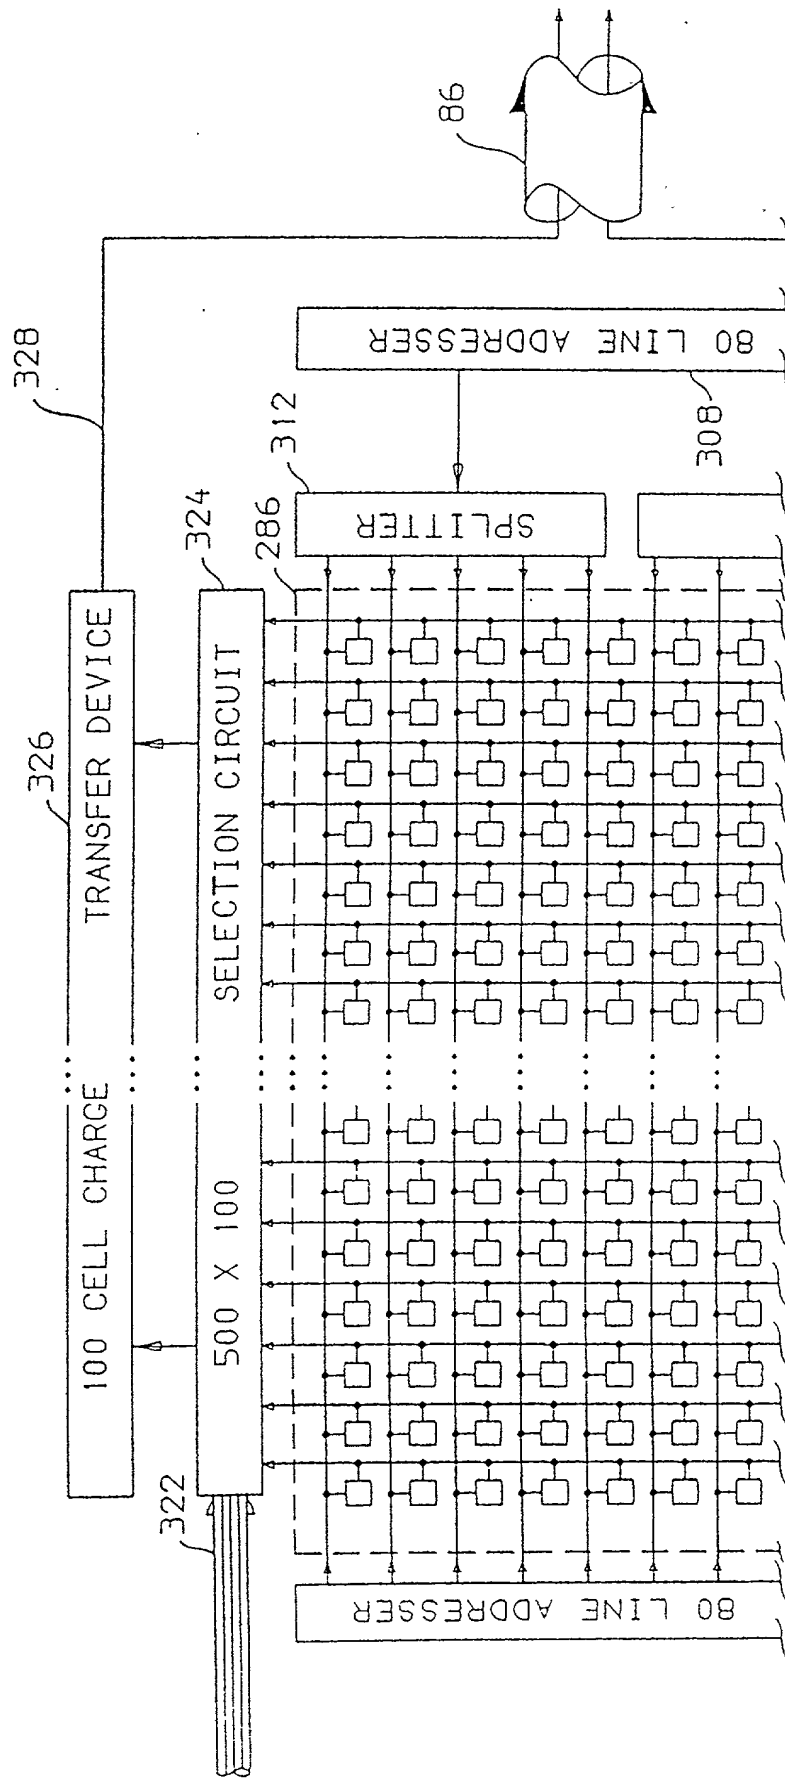


FIG. 13(d)

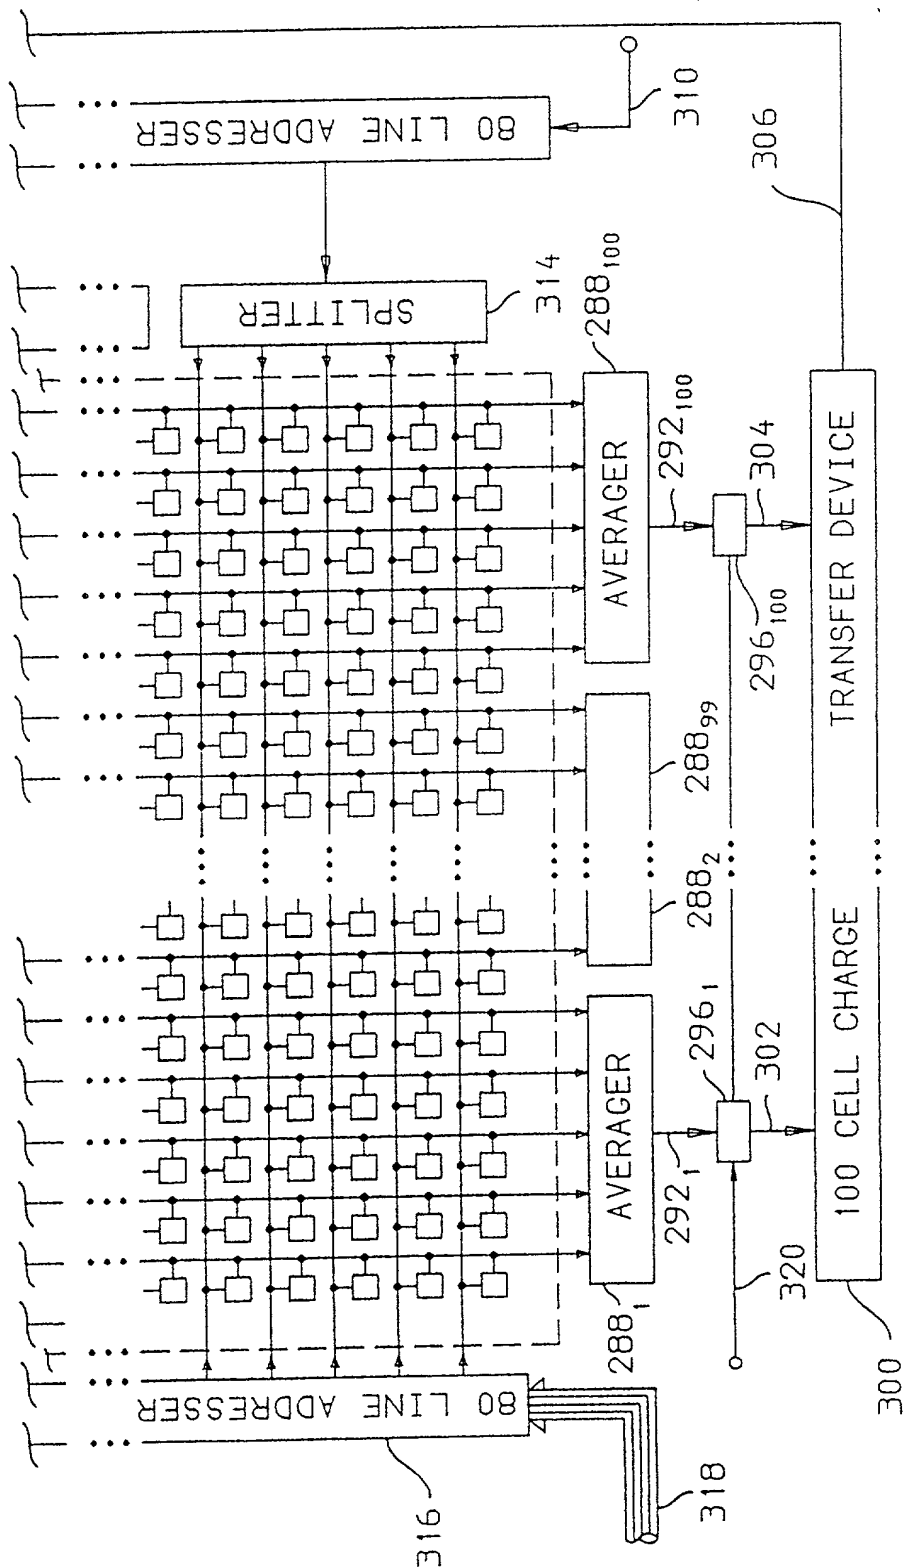
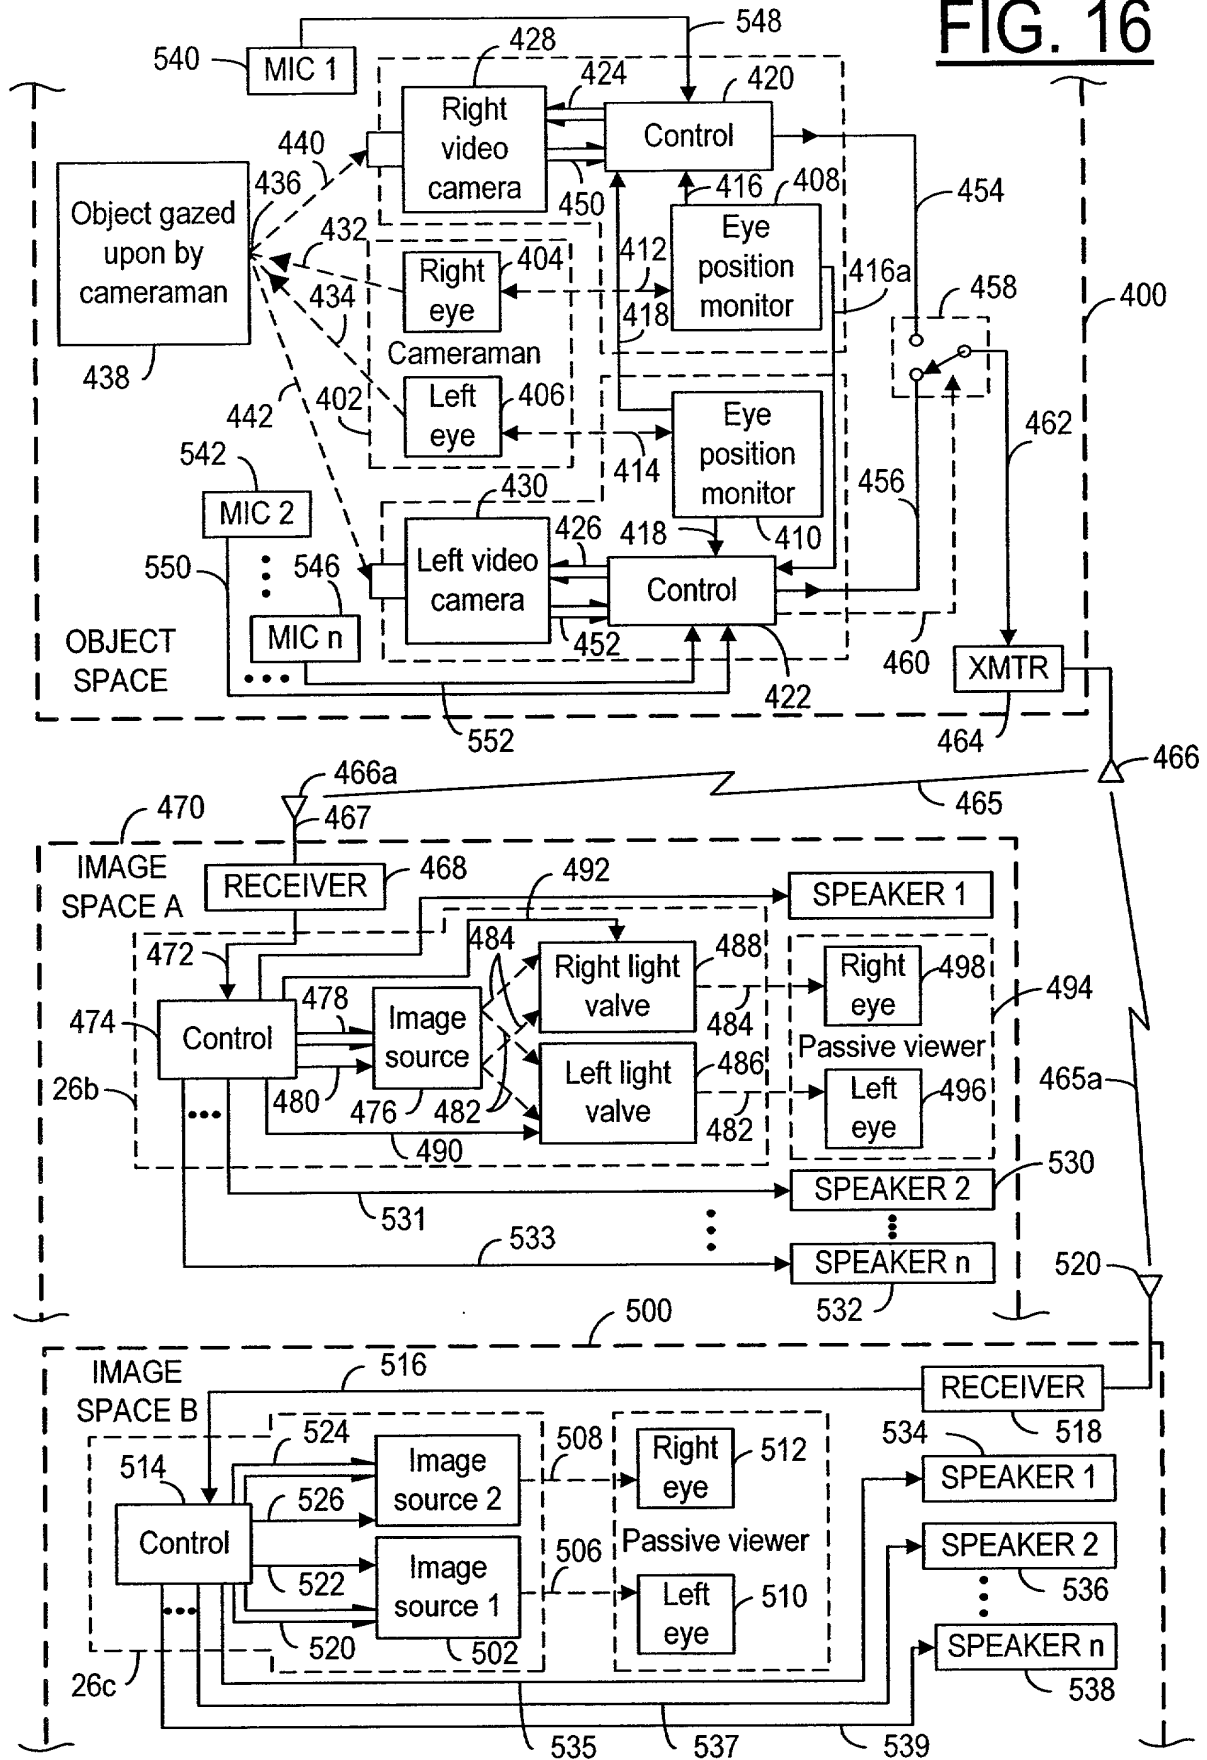


FIG. 13(e)

FIG. 16



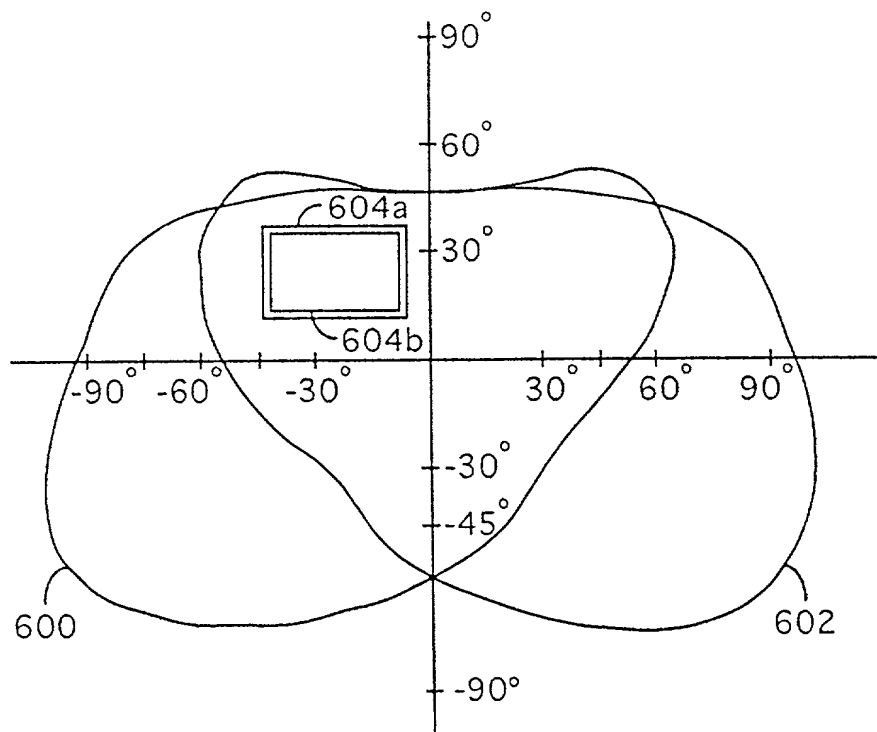


FIG. 18(a)

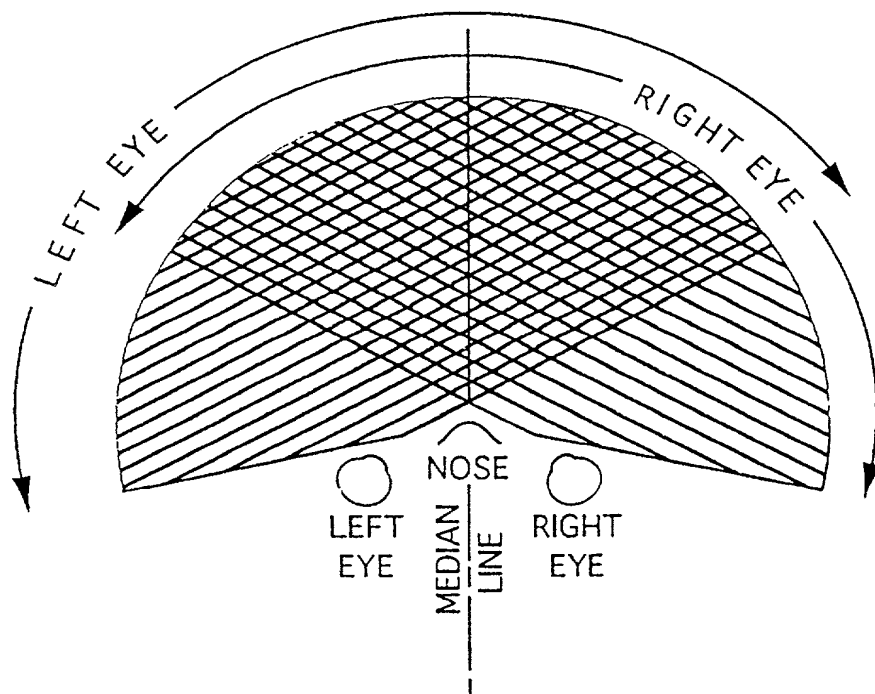


FIG. 18(b)

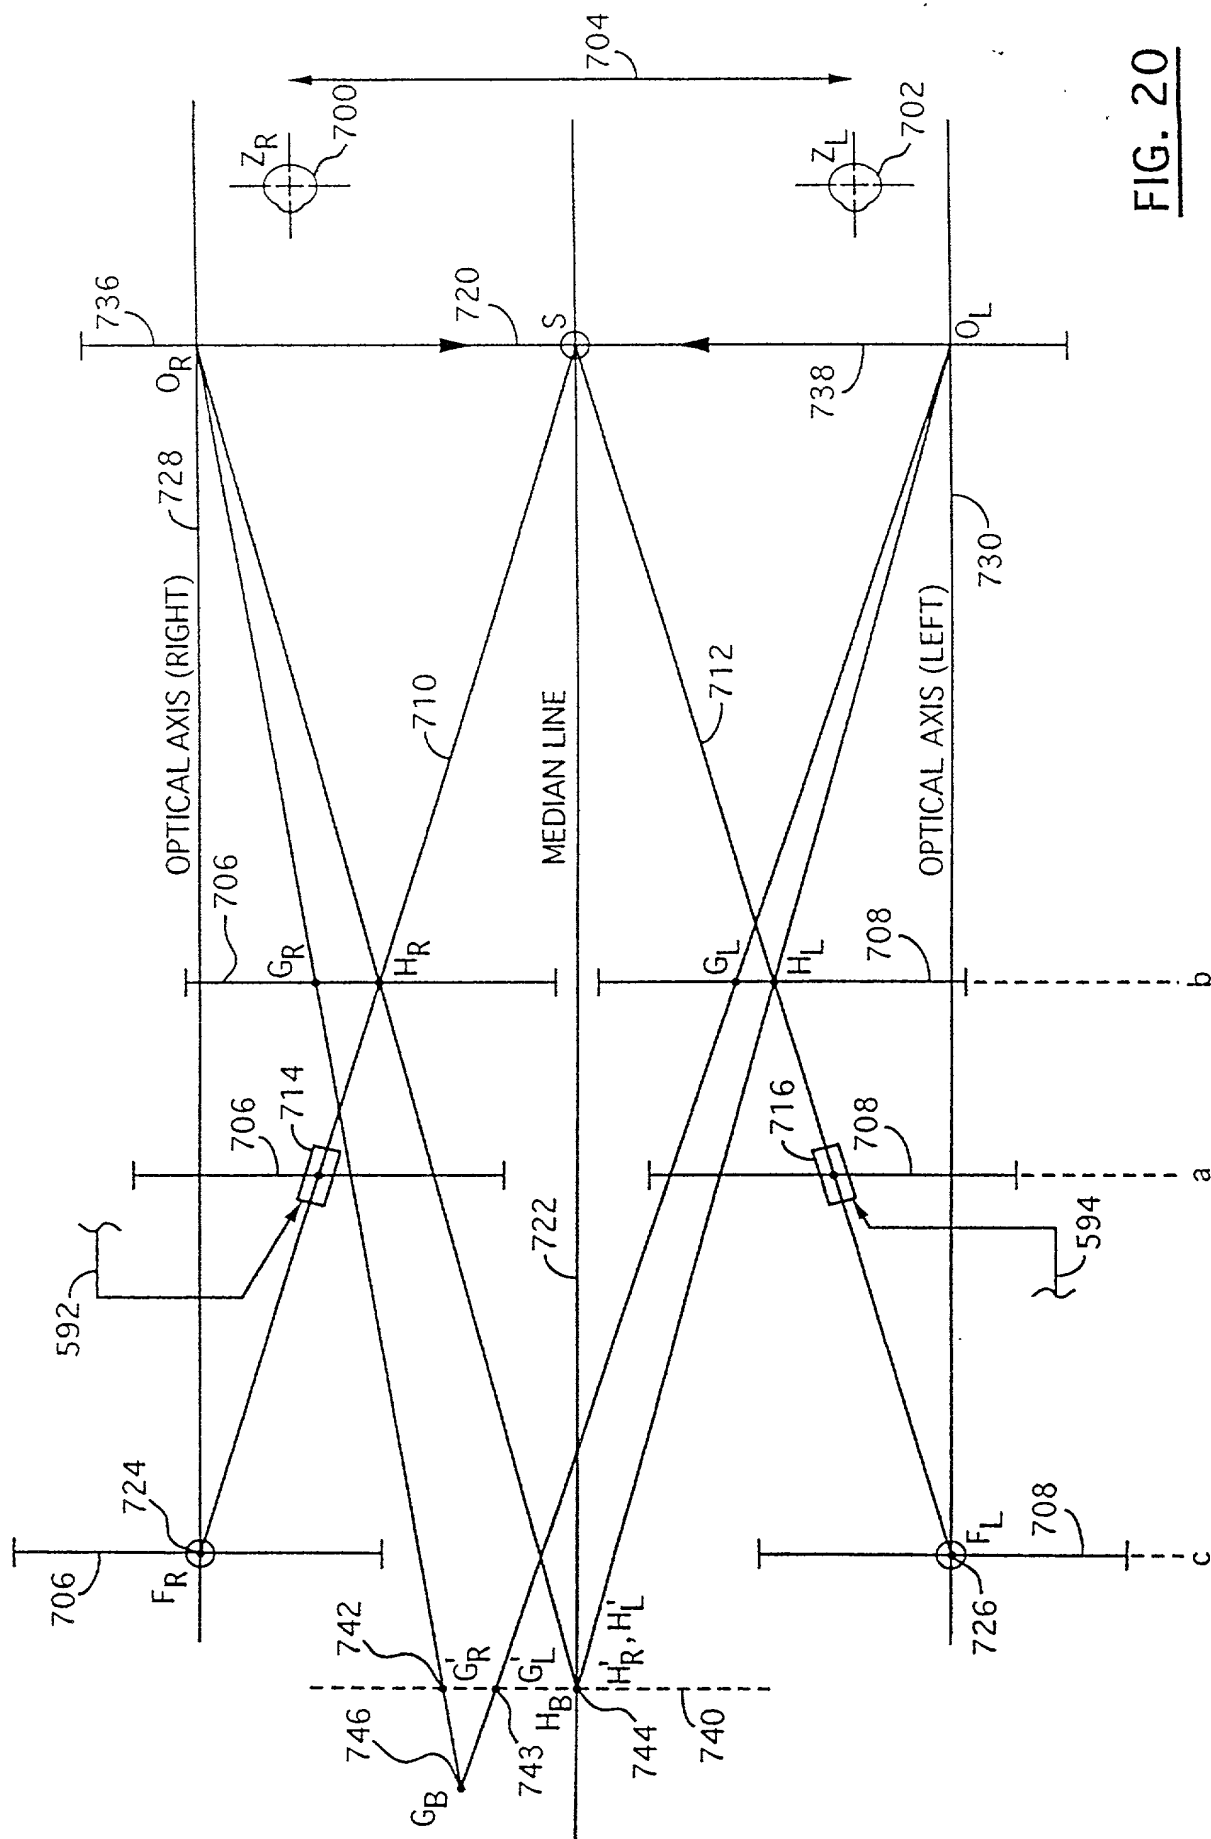


FIG. 20

FIG. 21(a)





FIG. 21(b)

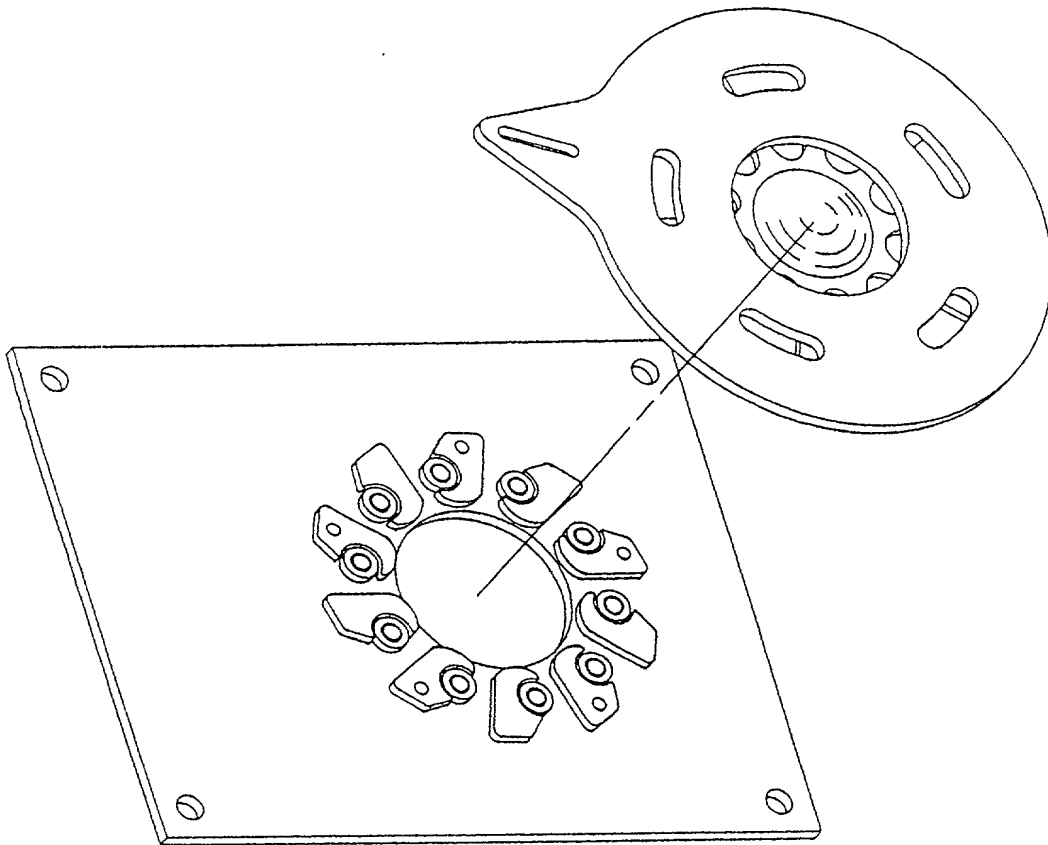




FIG. 33

FIG. 1 is a perspective view of a head-mounted display (HMD) 800. The HMD includes a front display 802, a top display 806, and a rear display 808. A central processing unit 804 is located between the front and rear displays. A user's head 810 is shown wearing the HMD. A coordinate system is defined by X, Y, and Z axes. Other labels include 812, 814, 816, 828, 830, 844, and 846.

FIG. 25

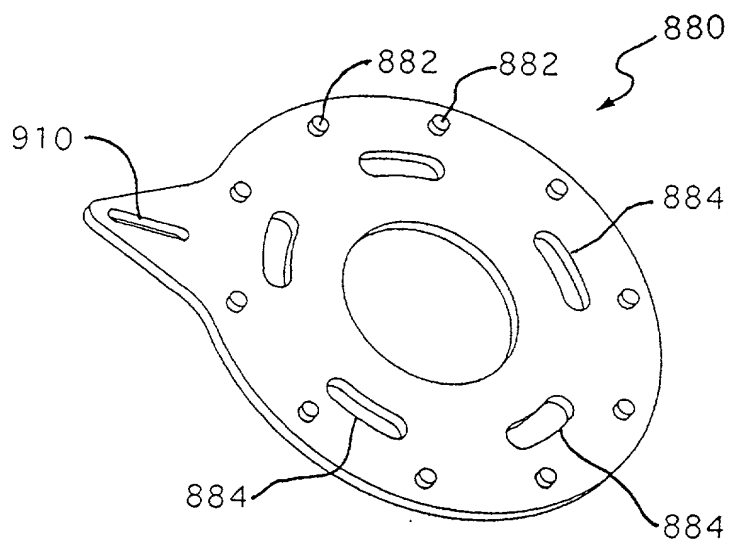


FIG. 29

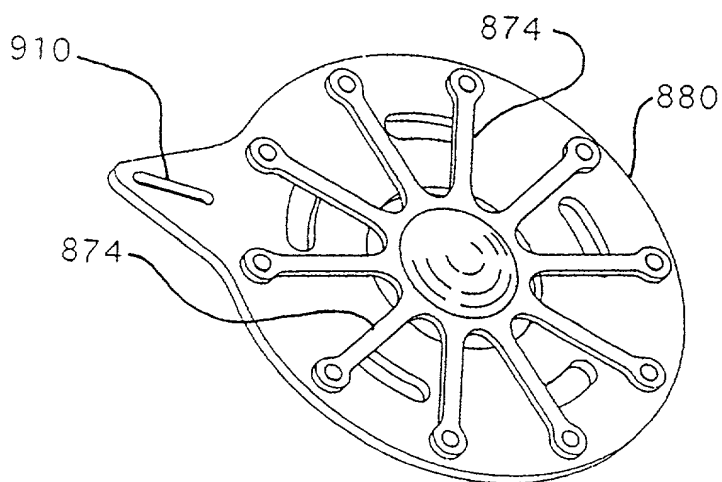


FIG. 30

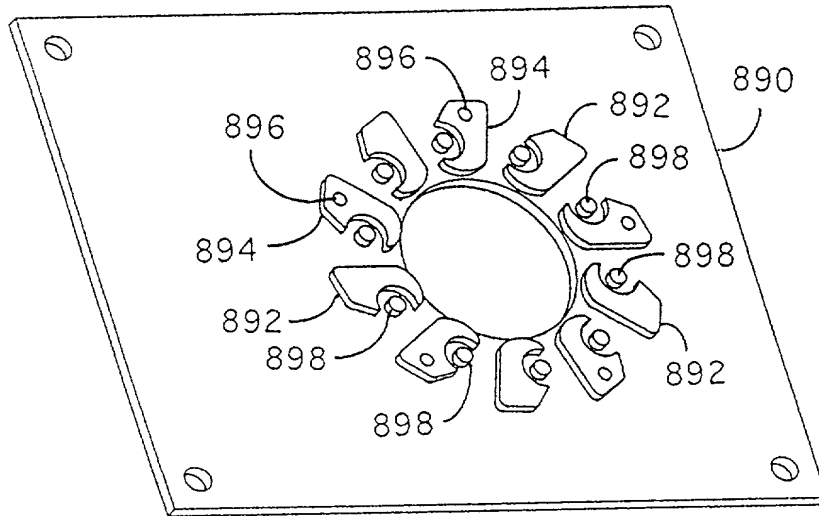


FIG 31

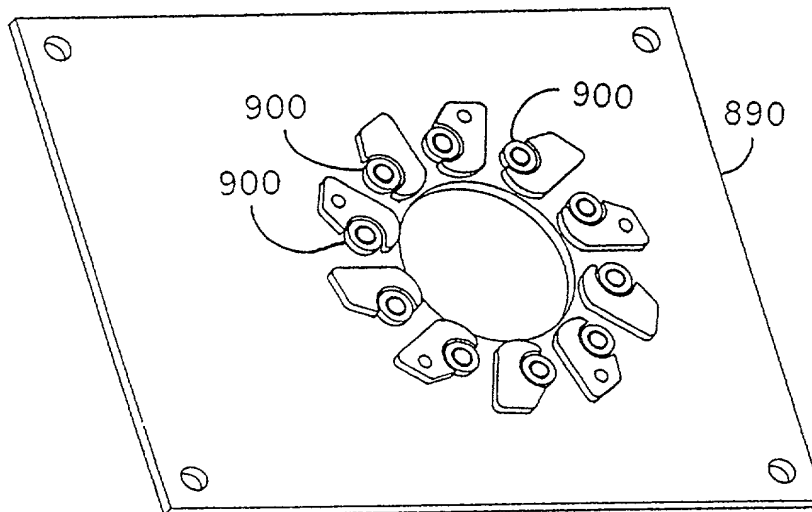


FIG 32

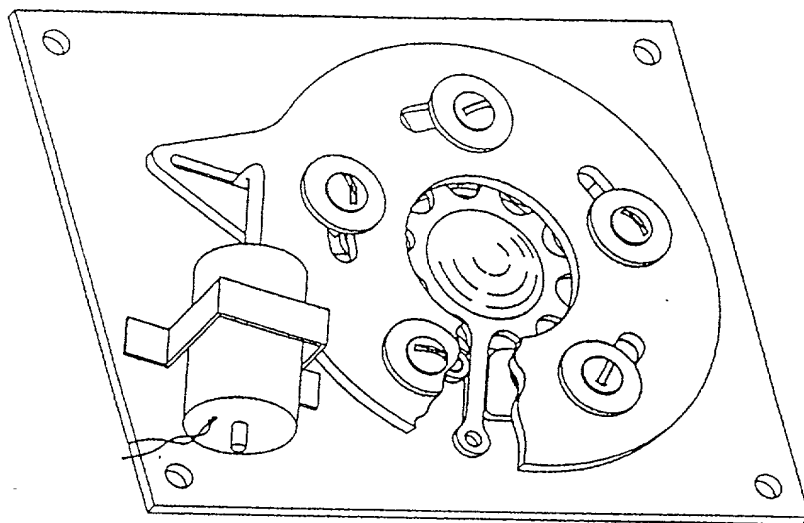


FIG. 34

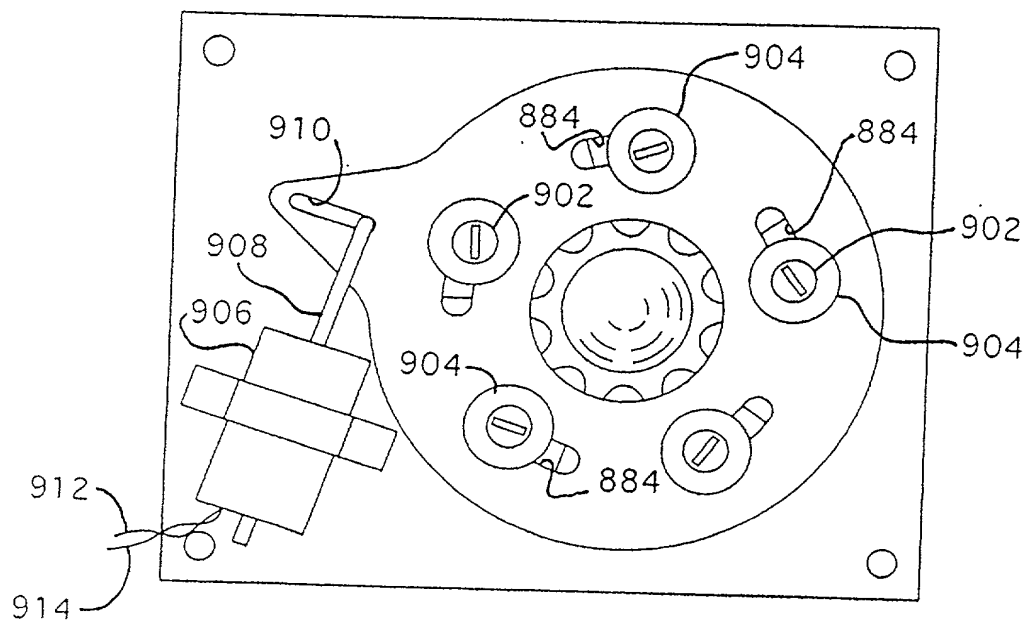


FIG. 35